

---

&

# REVO

---

DIRECT VENT GAS FIREPLACES



---

HEAT & GLO

---



REVOLUTIONARY  
INNOVATIONS

# REVO

Only 7-inches deep. And the world's thinnest Direct Vent gas fireplace series. In square, vertical or horizontal models. Experience stunning design and efficient heat output in REVOLUTIONARY new ways.

## CREATIVE VERSATILITY


Small on space. Big on impact. The REVO can go nearly anywhere. Hang one on the wall. Or partially recess in-wall. The choice is yours.

## TAILORED TO YOU

Create your custom look. With attention to every last detail. Select from more than 10 options for a tailored finish.



**FRONT OPTIONS** All front options are available for all REVO models and include standard mesh safety barrier screens.

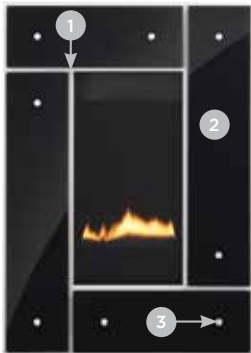

STUDIO



FRAME



RADIUS

### 1 STUDIO BASE FINISHES



BLACK FOG GRAY

### 2 STUDIO FRONT PANEL FINISHES



BLACK WHITE STAINLESS STEEL

### 3 STUDIO PANEL KNOBS



BLACK WHITE SILVER


### FRAME & RADIUS FRONT FINISHES



BLACK GRAPHITE NEW BRONZE

## LED BACKLIGHTING OPTION

Multicolored LED backlighting adds impact to modern fires. Choose from up to 7 shades, and enjoy with or without the flames. Not available on Radius front.



RED AMBER LIME GREEN CYAN ROYAL BLUE LIGHT PURPLE

## REMOTE CONTROL



Designed specifically for use with the IntelliFire Plus ignition system. It is easy-to-use, stylish and ergonomic in design.

Comes standard with the REVO.

Left: REVO HORIZONTAL shown with radius front in new bronze  
Above and Cover: REVO SQUARE shown with studio front with fog gray base, black panels and silver knobs

# REVO TECHNOLOGIES



## INTELLIFIRE™ IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.




## DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.

### REVO SERIES SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT (NG)
	UNIT	IN-WALL FRAMING	UNIT	IN-WALL FRAMING	UNIT	IN-WALL FRAMING	UNIT	IN-WALL FRAMING		
REVO Vertical	19-1/4 [491]	20-1/8 [511]	19-1/4 [491]	20-1/8 [511]	36-1/8 [918]	43-1/8 [1095]	6-3/8 [162]	2-5/8 [67]	12 x 24 [305 x 610]	8,200 - 14,250
REVO Square	28-1/2 [722]	29-3/8 [746]	28-1/2 [722]	29-3/8 [746]	33-5/8 [854]	40-1/2 [1029]	6-3/8 [162]	2-5/8 [67]	21-1/8 x 21-3/8 [537 x 543]	10,900 - 18,800
REVO Horizontal	38-1/4 [973]	39-3/8 [1000]	38-1/4 [973]	39-3/8 [1000]	29-1/8 [741]	39 [991]	6-3/8 [162]	2-5/8 [67]	31 x 17 [787 x 432]	12,700 - 24,000

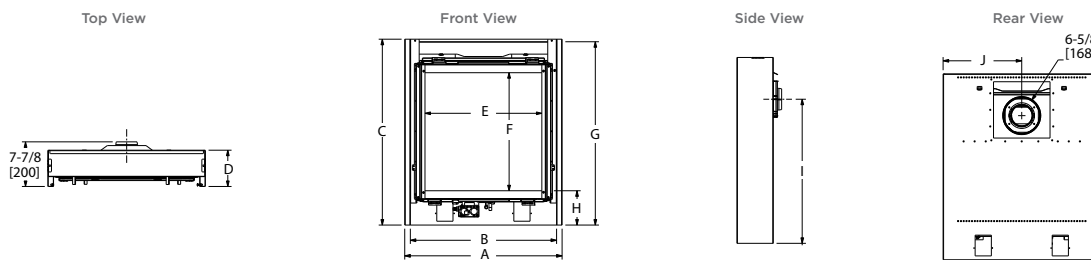

Model	A	B	C	D	E	F	G	H	I	J
Vertical	19-1/4 [491]	16-5/8 [440]	36-1/8 [918]	6-3/8 [162]	12 [305]	24 [610]	35-5/8 [905]	6-1/8 [156]	28-1/2 [724]	9-5/8 [244]
Square	28-1/2 [722]	25-3/4 [722]	33-5/8 [854]	6-3/8 [162]	21-1/8 [537]	21-3/8 [543]	33-3/16 [843]	6-1/4 [159]	26 [662]	14-1/4 [362]
Horizontal	38-1/4 [973]	35-5/8 [905]	29-1/8 [741]	6-3/8 [162]	31 [787]	17 [432]	28-3/4 [730]	6-1/8 [156]	21-1/2 [548]	19-1/8 [486]

Dimensions above are in inches. Reference dimensions only. We recommend measuring individual units at installation. NOTE: Combustible material should not be installed over the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures are not a true representation of the fireplace and/or flames.

## U.S. EFFICIENCIES

**Steady State** - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

**AFUE** - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	REVO HORIZONTAL	REVO SQUARE	REVO VERTICAL
STEADY STATE	68.4% (NG)	63% (NG)	63.7% (NG)
AFUE	66.3% (NG)	62.7% (NG)	61.8% (NG)

## CANADA EFFICIENCIES

**EnerGuide (CSA P.4.1-02)** - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	REVO HORIZONTAL	REVO SQUARE	REVO VERTICAL
ENERGUIDE (CSA P.4.1-02)	67.5 (NG)	64.5 (NG)	60.2 (NG)

For complete information on this model, please contact us at:



No one builds a better fire

Web: [heatnglo.com](http://heatnglo.com)  
Phone: (888) 427-3973 (952) 985-6000  
E-mail: [info@heatnglo.com](mailto:info@heatnglo.com)

- [facebook.com/HeatandGlo](https://facebook.com/HeatandGlo)
- [twitter.com/HeatandGlo](https://twitter.com/HeatandGlo)
- [youtube.com/HeatandGlo](https://youtube.com/HeatandGlo)

HNG-1128U-1014

## LIMITED LIFETIME WARRANTY<sup>1</sup>

The strongest in the industry, Heat & Glo<sup>®</sup> provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

<sup>1</sup> For full warranty details, go to [www.heatnglo.com](http://www.heatnglo.com).

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit [www.heatnglo.com/fireplacesafety](http://www.heatnglo.com/fireplacesafety)

