



GAS INSERTS

INSPIRED INNOVATION. You don't have to sacrifice the warmth and glow of a wood burning fireplace for the simplicity and ease of gas. No more drafty, dated fireplace with messy maintenance, soot and smoke. Heat & Glo gas inserts fit inside an existing masonry or manufactured wood burning fireplace, providing an instant upgrade. Warm up to greater performance, safety and convenience.



AN INSTANT UPGRADE





NO MESS. NO HASSLE.

ESCAPE

STANDARD FEATURES

- 30" and 35" viewing areas
- Up to 40,000 BTUs
- IntelliFire Touch® ignition system with touchscreen remote control and Wi-Fi option
- Six hand-painted oak-style logs
- · Anti-reflective glass
- ClearVue[™] screen
- · Patented FireBrick® seamless interior
- Five front designs
- Three surround sizes
- · Illuminated ember bed
- Fan

SUPREME

STANDARD FEATURES

- 25", 30" and 35" viewing areas
- Up to 35,000 BTUs
- IntelliFire Touch® ignition system with touchscreen remote control and Wi-Fi option
- Ceramic glass with basic screen
- Ceramic fiber logs:
 - Five logs for 25" and 30" inserts
 - Six logs for 35" insert
- Three front designs*
- Three surround sizes
- Fan

OPTIONAL FEATURES

- · Interior panels
- Accent Lighting (30" and 35" only)

PROVIDENT


STANDARD FEATURES

- 30" and 35" viewing areas
- Up to 32,700 BTUs
- IntelliFire® ignition system
- · Ceramic glass with basic screen
- · Four ceramic fiber logs
- · One front design*
- Three surround sizes

OPTIONAL FEATURES:

- Interior panels
- Remote

 Fan *Inside fit front available for use with custom surrounds that are smaller than a standard overlap door

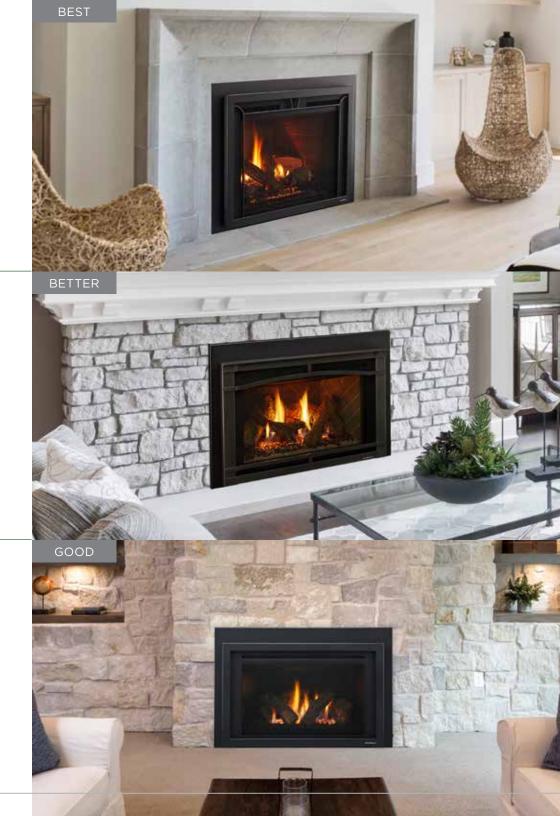

COSMO

- 30" and 35" viewing areas
- Up to 30,000 BTUs
- IntelliFire Touch® ignition system with touchscreen remote control and Wi-Fi option
- · Three front designs*
- Three surround sizes
- · Fade resistent fluted black glass
- Six glass media options (required for install)
- Fan



*Inside fit front available for use with custom surrounds that are smaller than a standard overlap door

THREE EASY STEPS TO UPGRADE YOUR EXISTING WOOD-BURNING FIREPLACE:


STEP 1: MEASURE YOUR EXISTING FIREPLACE AND SELECT YOUR INSERT.

The height, width and depth of the existing fireplace opening is needed to ensure selection of an appropriately-sized insert:

A. Fireplace front width
B. Fireplace front height
C. Fireplace back width
D. Fireplace depth

E. Hearth to mantel height_____

If you have a manufactured wood burning fireplace, measure from the inside of the fireplace opening, not the outside trim.



STEP 2: SELECT YOUR FRONT AND SURROUND


Personalize your gas insert with a front and finish that fits your style. Include a surround to fill the gap between the gas insert and existing fireplace opening. Choose from three sizes and three finishes for a unique look.

SURROUND	ESCAPE-35-IFT SUPREME-I35-IFT COSMO-I35-IFT	ESCAPE-30-IFT SUPREME-I30-IFT COSMO-I30-IFT	SUPREME-I25-IFT		
Small	42" × 29"	40" × 27"	35" x 23"		
Medium	44" x 32"	42" x 30"	37" x 26"		
Large	48" x 32"	44" × 32"	39" x 28"		

SMALL SURROUND

MEDIUM SURROUND

LARGE SURROUND

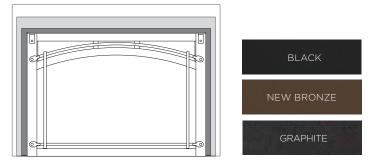

STEP 3: SELECT YOUR OPTIONS

Choose from our collection of fronts, interior panels, interior media to put the finishing touches on your insert.

FRONT OPTIONS

BEST ESCAPE



CHATEAU FORGE Available in hand-crafted, hammered steel.



GALLERIA Available in black, new bronze or graphite.



HALSTON Available in black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze or graphite.

BETTER SUPREME




HALSTON ARCH Available black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze, graphite or gray.



NEW BRONZE







GOOD PROVIDENT



FIRESCREEN Available in black, new bronze, graphite or gray.

TRANSITIONAL OR MODERN COSMO



HALSTON ARCH Available black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze, graphite or gray.



in SIDE FIT Available in black for Supreme, Provident and COSMO for installations that require a front smaller than a standard overlap door

ESCAPE



FIREBRICK SEAMLESS INTERIOR (Standard)

SUPREME AND PROVIDENT



BLACK METAL (Standard)



STRATFORD TEXTURED BRICK (Optional upgrade on Supreme and Provident)



TRANQUIL GREIGE HERRINGBONE BRICK (Optional upgrade on Supreme)



REFLECTIVE BLACK GLASS (Optional upgrade on Supreme)

COSMO



FLUTED BLACK GLASS (Standard)



REFLECTIVE **BLACK GLASS** (Optional)

COSMO INTERIOR OPTIONS

Customize your fire. Each distinctive option highlights the flames differently. Glass media required for installation.



CLEAR GLASS



EBONY GLASS



AMBER GLASS



COBALT GLASS



SCARLET GLASS



ICED FOG GLASS



CERAMIC RIVER **ROCK STONES** (Optional)



DRIFTWOOD LOGS (Optional)

CONTROLS

INTELLIFIRE® APP

All the features of a remote control with an app installed on your smart device. Monitor your fire from anywhere or even control it with the


sound of your voice. IntelliFire is compatible with voice assistants Amazon Alexa and Google Assistant.



TOUCHSCREEN REMOTE

Features: on/off, flame height adjustment, fan speed, lights adjustment, thermostat

mode, room temperature readout, child lock, timer mode, battery backup, cold climate mode, power vent, wall docking station (fan, lights and power vent are dependent on your fireplace).



climate mode

WIRELESS WALL SWITCH



PROVIDENT: **SMARTREMOTE** (Optional)

Features: on/off, timer mode, thermostat mode, room temperature readout



TERMINATION CAPS

A termination cap finishes your gas insert with a clean, upscale look. These durable caps also protect venting components and ensure safe exhaust flow.



ROUND CAP



SQUARE CAP Available in black or copper finish





GAS INSERTS



INTELLIFIRE TOUCH IGNITION SYSTEM

IntelliFire Touch is our most advanced intermittent-pilot ignition (IPI) system, making operating your appliance simple, smart and safe. Select the IntelliFire app, touch-screen remote control or wireless wall switch for the solution that fits your lifestyle.



INTELLIFIRE IGNITION SYSTEM (IPI)

IntelliFire features intermittent-pilot ignition (IPI) allowing you to conserve fuel and money when the fireplace is not in use.



DIRECT VENT TECHNOLOGY

Direct Vent gas inserts remove 100% of combustion exhaust and fumes to the outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



FIREBRICK TECHNOLOGY

Available on Escape inserts, FireBrick is a patented, energy-saving ceramic material molded in an authentic masonry design. FireBrick produces up to 25% more radiant heat than metal fireboxes—heating rooms faster and using less fuel. This increases efficiency and reduces heating costs. A unique ceramic composition is at the core of the FireBrick innovation.



STANDARD FEATURE COMPARISON

	PACKAGE	MODEL	IGNITION SYSTEM	FRONT DESIGN OPTIONS	VIEWING AREA	FAN	REMOTE CONTROL	INTELLIFIRE APP/VOICE CONTROL	THERMOSTAT CONTROL	INTERIOR PANELS	ACCENT LIGHTING
	BEST	ESCAPE 30"/35"	IntelliFire Touch	5	Anti-reflective glass with ClearVue screen	Yes	Touchscreen Remote	Optional	Yes	Patented FireBrick	Yes
	BETTER	SUPREME 25"/30"/35"	IntelliFire Touch	3*	Ceramic glass with basic screen	Yes	Touchscreen Remote	Optional	Yes		
	GOOD	PROVIDENT 30"/35"	IntelliFire (IPI)	1*	Ceramic glass with basic screen						
	TRANSITIONAL	COSMO	IntelliFire		Ceramic glass		Touchscreen			Fluted	
1	OR MODERN	30"/35"	Touch	3*	with basic screen	Yes	Remote	Optional	Yes	Reflective Black Glass	

^{*}Inside fit front is available for installations that require a custom surround that is smaller than a standard overlap door.

EFFICIENCIES

EnerGuide (CSA P.4.1-15)

Used in Canada and some US states to measure annual fireplace efficiency.

MODEL	RATING				
ESCAPE-35-IFT	72.90% (NG), 73.80% (LP)				
ESCAPE-30-IFT	70.70% (NG), 71.10% (LP)				


MODEL	RATING
SUPREME-I35	71.61% (NG), 71.20% (LP)
SUPREME-I30	70.91% (NG), 71.00% (LP)
SUPREME-125	68.01% (NG), 66.00% (LP)


MODEL	RATING				
PROVIDENT-I35	74.80% (NG), 74.40% (LP)				
PROVIDENT-I30	67.70% (NG), 70.10% (LP)				


MODEL	RATING				
COSMO-I35	72.01%(NG), 69.20% (LP)				
COSMO-I30	69.81% (NG), 69.00% (LP)				

ESCAPE SPECIFICATIONS

	FRONT WIDTH (A)		BACK WIDTH (B)		HEIGHT (C)		DEPTH (D)				
MODEL	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING	GLASS SIZE (E X F)	BTU/HOUR INPUT (NG)	CONVECTION BLOWER
ESCAPE-35-IFT	34-5/8 [879]	35-1/8 [892]	25 [635]	25-1/2 [648]	24-3/8 [619]	24-5/8 [625]	17-7/8 [454]	18-1/8 [460]	31-3/8 x 19-7/8 [797 x 505]	40,000	120 CFM
ESCAPE-30-IFT	30 [762]	30-1/2 [775]	21 [533]	21-1/2 [546]	22-3/8 [568]	22-5/8 [575]	16-3/8 [410]	16-5/8 [422]	26-11/16 x 17-7/8 [678 x 454]	36,000	120 CFM
LEFT SIDE VIEW				FRONT VIEW	/		TOP VIEW		RIGHT SIDE VIEW		












SUPREME, COSMO & PROVIDENT SPECIFICATIONS

	FRONT WIDTH [A]		BACK WIDTH [B]		HEIGHT [C]		DEPTH [D]				
MODEL	UNIT	MIN FIREBOX OPENING	UNIT	MIN. OPEN	UNIT	MIN FIREBOX OPENING	UNIT	MIN FIREBOX OPENING	GLASS SIZE [E X F]	BTU/HOUR INPUT (NG)	CONVECTION BLOWER
SUPREME-125- IFT	26-1/8" [664mm]	26-5/8" [676mm]	14-5/8" [372mm]	15-1/8" [384mm]	17-1/16" [433mm]	17-5/16" [439mm]	14-1/2" [368mm]	15" [381mm]	22-1/2" X 12-7/16" [572mm X 316mm]	27,000	160 CFM
SUPREME-I30- IFT	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	32,700	160 CFM
SUPREME-I35- IFT	36-1/8" [918mm)	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	35,000	160 CFM
PROV-I30-IPI	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	30,000	160 CFM
PROV-I35-IPI	36-1/8" [918mm)	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	32,700	160 CFM
COSMO-I30-IFT	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	28,000	160 CFM
COSMO-I35-IFT	36-1/8" [918mm)	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	30,000	160 CFM









Dimensions above are in inches. Reference dimensions only. We recommend measuring individual units at installation. NOTE: Combustible material should not be installed over the face. Make sure you do NOT cover the decorative door opening. Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures in this brochure are not a true representation of the fireplace and/or flames.

For complete information on these models, please contact us at:



No one builds a better fire

Web: heatnglo.com Phone: (888) 427-3973 E-mail: info@heatnglo.com



twitter.com/HeatandGlo

youtube.com/HeatandGlo

HNG-1142U-0420

LIMITED LIFETIME WARRANTY²

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

²For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

Google, YouTube and Google Home are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



